

CE



# GALTA

GREY LINE

4 POST LIFTS



GT-FP-LT



GT-FP

VEHICLE LIFTS



ITALIAN PREMIUM QUALITY

# GT - FP 3.5 - 4.5 - 5.5

Four post electrohydraulic lift ideal for 3D technology wheel alignment - 2 independent ropes - pneumatic release with safety lock - with anti-knock valve - standard rolling jack lane - standard engine power 2,2KW - 400V/3PH /50 HZ - on request: 2,2 KW - 220 V/1PH/50HZ - Pneumatic connection for safe release required 6/8 bar

Sollevatore elettroidraulico 4 colonne ideale per assetto ruote a tecnologia 3D - 2 funi indipendenti - valvola paracadute - corsia standard rolling jack - potenza motore 2.2/3.0kw - 400V/3PH/50Hz - a richiesta 2,2 KW - 220V/1PH/50HZ - richiesta connessione aria per lo sgancio sicure 4/8bar

MODEL	PLATFORM (mm)	CAPACITY	DISTANCE BETWEEN COLUMN	LIFTING HIGHT	DESCRIPTION
GT - FPA 3.5	4260 x 490	3.5 T	2564	220 - 1820	Front recess 685mm - for wheel alignment - sliding plates 1400mm - anti knock valve Incavo anteriore 685mm - piano oscillante 1400mm - valvola paracadute
GT - FPF 3.5	4260 x 490	3.5 T	2564	170 - 1770	Flat platform - anti knock valve Pedana piana a basso profilo - valvola paracadute
GT - FPA 4.5	5190 x 490	4.5 T	2742	246 - 1896	Front recess 1065mm - sliding plates 1400mm - anti knock valve - for wheel alignment Incavo anteriore 1065mm - piano oscillante 1400mm - valvola paracadute
GT - FPF 4.5	5190 x 490	4.5 T	2742	196 - 1846	Flat platform - anti knock valve Pedana piana - valvola paracadute
GT - FPA 5.5	5190 x 490	5.5 T	2742	246 - 1896	Front recess 1065mm - sliding plates 1400mm - anti knock valve - for wheel alignment Incavo anteriore 1065mm - piano oscillante 1400mm - valvola paracadute
GT - FPF 5.5	5190 x 490	5.5 T	2742	196 - 1846	Flat platform - anti knock valve Pedana piana - valvola paracadute

On request, all the platforms of the GT-FPA models can be provided with turning plates, and rolling jack.  
All our product are supplied with sandblasting. STANDARD COLOURS: GREY RAL 7016 - GREY RAL 7040

A richiesta tutte le pedane dei modelli GT-FPA possono ospitare piatti rotanti e rolling jack.  
Su tutti i ponti viene applicato il trattamento di sabbiatura. COLORI STANDARD: GRIGIO RAL 7016 - GRIGIO RAL 7040

## OPTIONAL

• Emergency Manual Descent Pump  
Pompa di emergenza manuale

• Kit LED lamp  
Kit lampade a LED

• Expansion bolt set (16pcs)  
Tasselli ad espansione (16pcs)

• Turning plates set for alignment + covers  
Piatti rotanti per allineamento + coperture

• Complete covers front recess  
Coperture complete per incavo anteriore

• Rolling jack 2T manual  
Rolling jack 2T manuale

• Rolling jack 2T pneumatic  
Rolling jack 2T pneumatico

• Rolling jack 3T pneumatic  
Rolling jack 3T pneumatico

NOTE \_\_\_\_\_





**3.500 Kg**

**4.500 Kg**

**5.500 Kg**

# GT - FPA 3.5/4.5/5.5

# GT - FPF 3.5/4.5/5.5

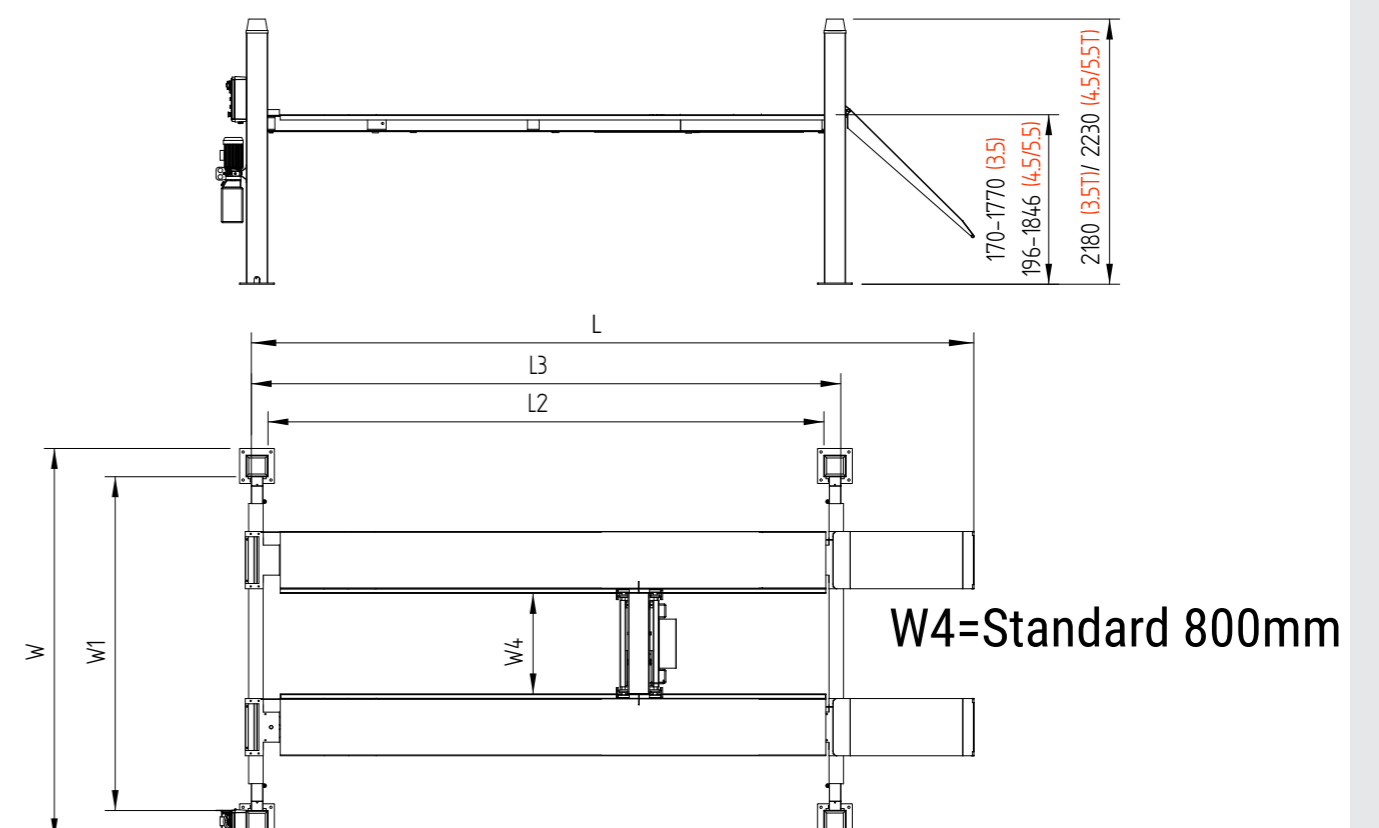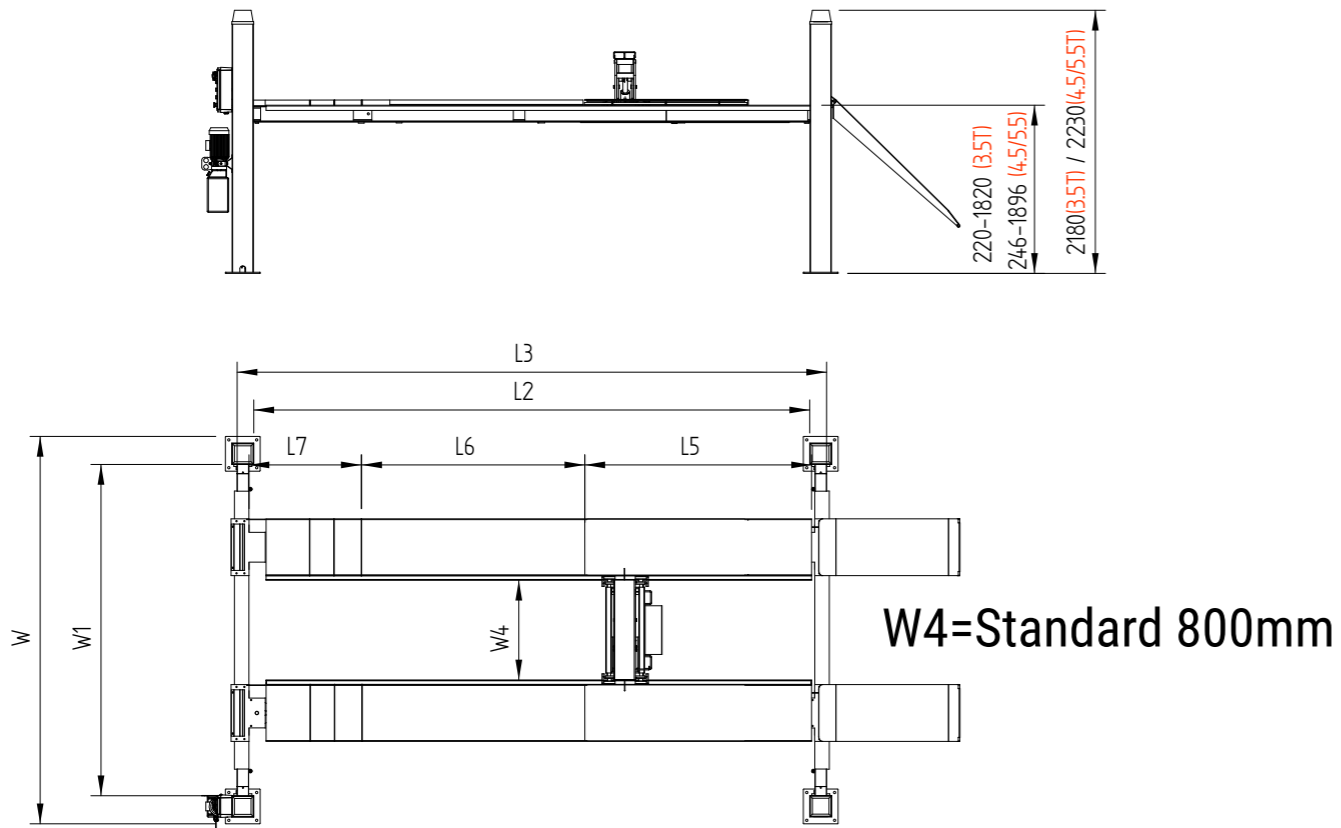


CODE	L	L1	L2	L3	L4	L5	L6	L7	W	W1	W2	W3	W4	H	H1	H2
GT - FPA 3.5	5206	4372	3812	4260	280	1400	1677	685	3124	2564	490	280	800 - 1100	2180	1820	220
GT - FPA 4.5	6288	5303	4703	5190	300	1400	1700	1065	3342	2860	490	300	800 - 1100	2230	1896	246
GT - FPA 5.5	6288	5303	4703	5190	300	1400	1700	1065	3342	2860	490	300	800 - 1100	2230	1896	246

CODE	L	L1	L2	L3	L4	L5	L6	L7	W	W1	W2	W3	W4	H	H1	H2
GT - FPF 3.5	5206	4372	3812	4260	280	1400	1677	685	3124	2564	490	280	800 - 1100	2180	1760	170
GT - FPF 4.5	6288	5303	4703	5190	300	1400	1700	1065	3342	2860	490	300	800 - 1100	2230	1846	196
GT - FPF 5.5	6288	5303	4703	5190	300	1400	1700	1065	3342	2860	490	300	800 - 1100	2230	1846	196



# GT - FPA-LT 5.0



4 column electrohydraulic lift with lift table, ideal for 3D technology wheel alignment - 2 independent ropes - pneumatic safety release - anti knock valve - Lift table capacity 3500kg - engine power 2.2 KW - 400V/3PH/50HZ on request 220V/1PH  
Pneumatic connection for safety release required 6/8 bar

Sollevatore elettroidraulico 4 colonne con torretta ideale per assetto ruote a tecnologia 3D - 2 funi indipendenti - sgancio sicuro pneumatico - valvola paracadute - Lift table portata 3500kg - potenza motore 2.2 KW - 400V/3PH/50HZ a richiesta 220V/1PH - Richiesta connessione pneumatica 6/8 bar.

MODEL	PLATFORM (mm)	CAPACITY PLATFORM	CAPACITY LIFT TABLE	DISTANCE BETWEEN COLUMN	LIFTING HEIGHT	DESCRIPTION
GT- FPA - LT	5190 X 640	5000 Kg	3500 Kg	2860	250 - 1890	Front recess 1025mm - lift table 1450x2160mm - rear recess 1912mm - anti knock valve - engine power 2.2kw - 400V/3PH Incavo anteriore 1025 mm - lift table 1450x2160mm - incavo posteriore 1912mm - valvola paracadute - potenza motore 2.2kw - 400V/3PH /50Hz

## OPTIONAL

• Emergency Manual Descent Pump  
Pompa di emergenza manuale


• LED lamp kit  
Kit lampade a LED

• Expansion bolt set (16pcs)  
Tasselli ad espansione (16 pcs)

• Rolling jack 2T manual  
Rolling jack 2T manuale

• Rolling jack 2T pneumatic  
Rolling jack 2T pneumatico

• Rolling jack 3T pneumatic  
Rolling jack 3T pneumatico

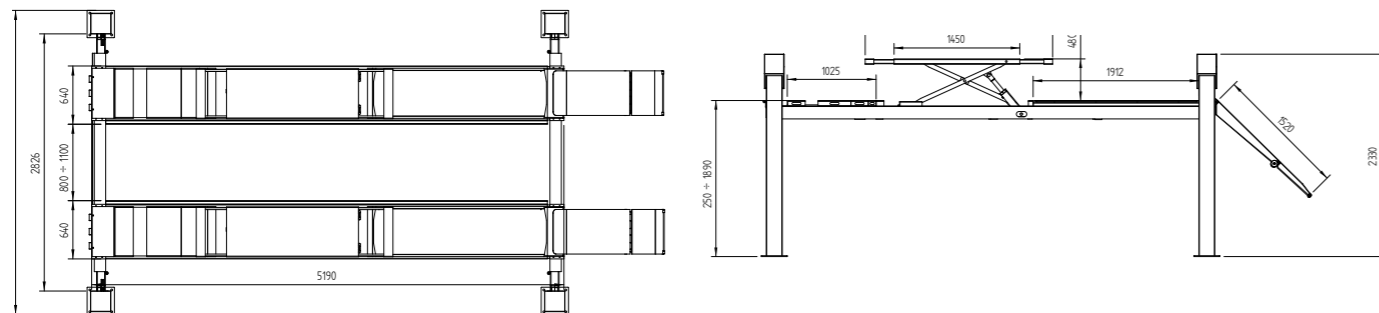

All our products are supplied with sandblasting.  
STANDARD COLOURS: GREY RAL 7016 - GREY RAL 7040

Su tutti i ponti viene applicato il trattamento di sabbiatura.  
COLORI STANDARD: GRIGIO RAL 7016 - GRIGIO RAL 7040



LIFT TABLE WITH PNEUMATIC RELEASE  
LIFT TABLE CON SGANCIO PNEUMATICO



LIFT TABLE WITH DOUBLE EXTENSION  
LIFT TABLE CON DOPPIA ESTENSIONE



DOUBLE APPROACHING RAMPS  
RAMPE SALITA DOPPIE



**5.000 Kg**



ROLLING JACK 2T/3T  
ROLLING JACK 2T/3T



LIFT TABLE WITH 1 EXTENSION  
LIFT TABLE CON 1 ESTENSIONE



LIFT TABLE WITH 2 EXTENSIONS  
LIFT TABLE CON 2 ESTENSIONI



# GALTA

Vat. n° 04058700248

Via Vittorio Lombardi 19/21 36075 - Montecchio Maggiore (VI) Italy

Phone : +39 0444 493977 - Fax: +39 0444 495999

[www.galta.it](http://www.galta.it)

[info@galta.it](mailto:info@galta.it)